

Rec'd PCT 23 AUG 2004

PCT/E 03 / 00027

10/505327



REC'D 24 MAR 2003

Patents Office  
Government Buildings  
Hebron Road  
Kilkenny

WIPO PCT

I HEREBY CERTIFY that annexed hereto is a true copy of the documents filed in connection with the following patent application:

Application No. S2002/0132

Date of Filing 21st February 2002


Applicant Simon Betson, an Irish Citizen of 97 Esker Park,  
Lucan, County Dublin, Ireland

Dated this 10<sup>th</sup> day of March 2003.

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

BEST AVAILABLE COPY

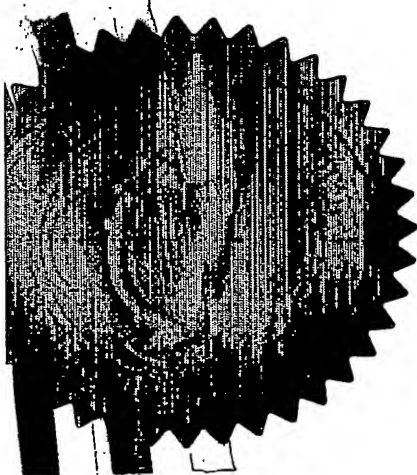

*Brian M. Kerran*

An officer authorised by the  
Controller of Patents, Designs and Trademarks.

FORM NO. 1

**REQUEST FOR THE GRANT OF A PATENT  
PATENTS ACT, 1992**

The Applicant named herein hereby request

☐ the grant of a patent under Part II of the Act

☒ the grant of a short-term patent under Part III of the Act

on the basis of the information furnished hereunder:

**1. APPLICANT**

Name	Simon Betson
Address	97 Esker Park, Lucan, County Dublin, Ireland
Description/Nationality	an Irish citizen

**2. TITLE OF INVENTION**

An Actuator

**3. DECLARATION OF PRIORITY ON BASIS OF PREVIOUSLY FILED APPLICATION FOR SAME INVENTION (SECTIONS 25 & 26)**

<u>Previous filing date</u>	<u>Country in or for which filed</u>	<u>Filing No.</u>
NONE	NONE	NONE

**4. IDENTIFICATION OF INVENTOR(S)**

Name(s) of person(s) believed by Applicant(s) to be the inventor(s)

1. Simon Betson

Address  
97 Esker Park, Lucan, County Dublin

**5. STATEMENT OF RIGHT TO BE GRANTED A PATENT (SECTION 17(2)(B))**  
by virtue of Applicant being the inventor

Contd./...

6. **ITEMS ACCOMPANYING THIS REQUEST - TICK AS APPROPRIATE**

- (i) ☒ prescribed filing fee (€60.00)
- (ii) ☒ specification containing a description and claims  
☐ specification containing a description only
- ☒ Drawings referred to in description or claims
- (iii) ☒ An abstract
- (iv) ☐ Copy of previous application(s) whose priority is claimed
- (v) ☐ Translation of previous application whose priority is claimed
- (vi) ☐ Authorisation of Agent (this may be given at 8 below if this Request is signed by the Applicant(s))

7. **DIVISIONAL APPLICATION**

The following information is applicable to the present application which is made under Section 24

Earlier Application No:  
Filing Date:

8. **AGENT**

The following is authorised to act as agent in all proceedings connected with the obtaining of a Patent to which this request relates and in relation to any patent granted -

Name  
F. R. KELLY & CO.

Address  
at their address as recorded for the time being in  
the Register of Patent Agents

9. **ADDRESS FOR SERVICE (IF DIFFERENT FROM THAT AT 8)**

F. R. KELLY & CO

By:

  
EXECUTIVE

Date: February 21, 2002

TRUE COPY  
AS  
LODGED

APPLICATION NO. 5020132

1

An Actuator

This invention relates to an actuator.

5 According to the present invention there is provided an  
actuator comprising a series of elements each rotatable  
relative to the next, a housing accommodating at least  
part of the series of elements with one end of the  
series projecting freely beyond an exit of the housing,  
10 the elements being guided to follow a non-linear path  
to the exit, means for driving the series of elements  
relative to the housing to vary the total length of  
elements projecting beyond the exit, and means for  
maintaining the projecting elements in linear alignment  
15 in a substantially rigid column.

One application of the invention is in the construction  
of adjustable-height beds. If four such actuators were  
located at or near the four corners of the bed, with  
20 the linearly aligned columns of projecting elements  
arranged vertically and serving as the legs of the bed,  
then by driving the four sets of elements in  
synchronism the bed may be raised or lowered as  
desired. Alternatively, by driving the actuators only  
25 at the head or foot of the bed the latter may be tilted  
as desired. Also, the ability of the elements to  
follow a non-linear path means that those elements not  
forming part of a leg of the bed at any given time can  
be accommodated horizontally along the frame of the bed  
30 or in any other orientation depending on the space  
available. However, the invention is not limited to  
that application.

Embodiments of the invention will now be described, by way of example, with reference to the accompanying drawings, in which:

- 5 Fig. 1 is a partially cutaway perspective view of a first embodiment of the invention;

Fig. 2 is a side view of a second embodiment of the invention with certain components removed to reveal the  
10 underlying structure;

Fig. 3(a) is a diagram showing the principle of operation of the drive mechanism of the second embodiment;

15

Fig. 3(b) is a perspective view of part of the drive mechanism;

Fig. 4 is an external perspective view of the drive  
20 housing of Fig. 2;

Fig. 5 is a perspective view of the inside of one half of the drive housing, the other half being a mirror image of that shown;

25

Fig. 6 is a perspective view of one of the linked elements of the embodiment of Fig. 2;

Fig. 7 is a perspective view of the rotatable input  
30 guide of the embodiment of Fig. 2; and

Figs. 8(a) to 8(c) show the actuator of Fig. 2 with the input guide set at various angles.

In the following description the use of expressions of orientation such as top, bottom, vertical, etc., refer to the orientation of the embodiments as seen in drawings and do not constrain their orientation in use.

Referring to Fig. 1, an actuator comprises a rigid guide 10 having a pair of opposite substantially parallel inner and outer sidewalls 12A, 12B respectively (the inner sidewall 12A is shown partially cut away), a bottom wall 14 joining the lower edges of the sidewalls 12A, 12B and a top wall (not shown) joining the upper edges of the sidewalls 12A, 12B. The guide 10 is therefore a tunnel-like housing of substantially constant rectangular cross-section. The guide 10 has a relatively long linear input section 16 and a much shorter exit section 18, and curves through 90° between them.

A series of similar rigid elements, in the form of generally rectangular steel blocks 20, are held in tight registering engagement by a tensioned flexible steel strip 22 which is fixed at one end to the end block 20A and at the other end to the opposite end block 20B. Between these two end blocks 20A, 20B the strip 22 passes freely through aligned vertical slots 24 in the intermediate blocks 20. It will be understood that certain of the blocks 20 are omitted from Fig. 1 in order to show the underlying structure more clearly. In reality, except at the bend in the guide 10, the blocks 20 are maintained in tight face-to-face engagement all along the strip 22 by the

tension in the strip which imparts a compressive force to the blocks.

5 As seen, the series of blocks 20, held together by the  
tensioned strip 22, are accommodated in the guide 10  
such that the end block 20A is located within the  
relatively long linear input section 16 and the end  
block 20B is outside the guide, beyond the exit section  
18. The cross-section of each block 20, taken in a  
10 vertical plane normal to the longitudinal direction of  
the strip 22, is just slightly smaller than the  
internal dimensions of the guide 10 to allow the blocks  
to move smoothly to and fro along the guide.

15 Along its inner edge each block 20 has a forward-facing  
vertical rib 26A (the forward direction is taken to be  
the direction towards the end block 20B) and a  
rearward-facing vertical groove 26B. These have  
complementary curved surfaces such that the rib 26A of  
20 each block 20 engages the groove 26B of the next  
adjacent block. This allows the blocks to rotate  
smoothly relative to one another as they pass around  
the 90° bend in the guide 10, since around the bend the  
distance along the outer sidewall 12B is longer than  
25 the distance along the inner sidewall 12A so that the  
outer edges of the blocks 20 have to separate at that  
point, as seen in Fig. 1. Also, the inner edges of the  
slots 24 can be radiused to lessen the friction between  
the blocks 20 and the strip 22 around the bend in the  
30 guide 10.

It will be evident that if the end block 20A is pushed  
towards the exit section 18 of the guide 10 there will

- be a greater number of blocks projecting beyond the output section, whereas if the end block 20A is pulled away from the exit section 18 there will be a lesser number of blocks thus projecting. Thus the total
- 5 length of the blocks 20 projecting beyond the exit section 18 of the guide 10 is determined by the position of the block 20A in the relatively long linear input section 16.
- 10 Adjustment of the position of the block 20A in the input section 16 is effected by a linear actuator comprising an electric motor 28 which rotates a lead screw 30. The motor 28 is mounted on the input end of the guide 10 and the lead screw 30 passes axially along
- 15 the centre of the input section 16. Each block 20 except the end block 20A has a central hole 32 of sufficient diameter to allow the lead screw to pass freely through it. However, the end block 20A is designed as a nut, so that it is screw-threadedly
- 20 engaged by the lead screw 30. Thus, depending upon the direction of rotation of the lead screw 30, the end block 20A will either be driven towards or away from the exit section 18 of the guide, thereby varying the total length of the blocks 20 projecting beyond the
- 25 exit section 18.

Due to the tension in the strip 22 keeping the blocks 20 tightly up against one another and the engaging ribs 26A and grooves 26B on adjacent blocks, the length of

30 the blocks 20 projecting beyond the exit section 18 cannot readily twist or rotate out of face-to-face engagement. They are therefore maintained linearly



aligned in a substantially rigid self-supporting column.

A second embodiment of the invention is shown in Figs. 2 to 8. This embodiment comprises a drive housing 400 (Figs. 2, 4 and 5) which comprises two opposite halves 400A, 400B of which the inside structure of the housing half 400A is shown in Fig. 5. The housing half 400B is a mirror image of the housing half 400A, and the two halves are secured together along their edges 400C (Fig. 5) to form the complete housing seen in Fig. 4. The drive housing 400 has an entrance 402 on one side and an exit 404 at the bottom. The drive housing 400 may be moulded from aluminium or plastics material, or cast in steel, according to its dimensions and the intended loading.

A hollow, tunnel-like input guide 406 (Figs. 2 and 7) is mounted at the drive housing entrance 402. In particular, the guide 406 has a transverse cylindrical bore 408 which is engaged by a hollow cylindrical shaft 410 extending between the opposite major walls of the drive housing 400 to allow rotation of the entire guide 406 about the axis of the shaft 410 (Fig. 8). The housing 400 contains a drive means 412 to be described later.

A series of similar rigid hollow elements 414, moulded from plastics material, are connected to one another along one edge 416 of the series of elements for rotation about substantially parallel axes 418. To this end the front of each element 414 has a short pair of arms 420 which embrace a flange 422, Fig. 3(b), on

the rear of the preceding element, the arms and flange having aligned holes 424 through which passes a steel pivot pin (not shown). These pivot pins allow each element 414 to rotate relative to the next element such that the elements may assume a linearly aligned configuration wherein each element is in registering engagement with the next across its full width, as seen for the elements at the top right and bottom of Fig. 2, or may separate from its neighbours at its outer edges to allow the elements to change direction through the housing 400 as will be described. It will be understood that certain components are omitted from Fig. 2, for example the housing half 400B and some of the elements 414, in order to show the structure more clearly.

The pivotally connected series of elements 414 are accommodated in the drive housing 400 such that one end of the series is located within the input guide 406 and the other end of the series is outside the housing 400, projecting beyond the exit 404. Between these two ends the series of elements 414 curves through a variable angle dependent on the angular position of the input guide 406.

In order to maintain the elements 414 which project beyond the exit 404 linearly aligned in a substantially rigid self-supporting column 440, a flexible, substantially inelastic toothed belt 426 is provided. This may be made of the same material as is used for timing belts in motor vehicles. The belt 426 is fixed by staking or welding to the end element 414A and its teeth 428 engage corresponding teeth 430 - Figs. 3(b)

and 6 - recessed into the edges of the elements 414 along the opposite edges of the elements to the pivots 418. The belt 426 is maintained in engagement with the elements 414 throughout the length of the projecting column by a roller assembly 432 mounted in the housing 400 and which comprises two rollers 434 (Fig. 3) which press the belt 426 into proper engagement with the elements 414. The engagement of the belt teeth 428 with the element teeth 430 all along the length of the projecting column of elements prevents these from pivoting relative to one another and maintains them tight up against one another.

Each element 414 has a helically-threaded bore 436 whose axis, when the element is in linear alignment with other such elements in the projecting column 440, is coaxial with the other such bores in the column 440 to form a continuous helical thread along the centre of the column. The drive means 412 comprises a worm gear 438 disposed at the free end of a drive shaft 442 whose rotational axis is coaxial with that of the bores in the column 440. The worm gear 438 meshes with at least one element 414 in the column 440 at any one time such that rotation of the worm gear progressively drives the elements out of the housing 400, or draws them into the housing 400, thereby increasing or decreasing the length of the column 440, according to the direction of rotation of the worm gear.

The belt 426, which passes out of the drive housing 400 through a hole 448 (Fig. 5), is accommodated on a take-up spool 444 which is biased by a coil spring (not shown) for rotation in a direction which maintains the

belt 426 under slight tension and tends to wind the belt on the spool, as indicated by the arrow in Fig. 2. As the projecting column 440 increases in length the belt 426 is pressed by the roller assembly 432

5 progressively into engagement with consecutive elements 414 as they emerge from the housing exit 404, against the bias of the coil spring. When the column 440 is decreasing in length the belt 426 progressively disengages the elements 414 and is wound onto the spool  
10 444 by the coil spring. A fin-like element 446 in the housing 400 ensures that the belt 426 separates cleanly from the elements 414.

Within the housing 400 the elements 414 follow a non-  
15 linear path between the entrance 402 to the exit 404. This path is defined by a first, straight guide rail 450 near the exit 404 which is contiguous with a second, part-circular guide rail 452 whose centre of curvature is coaxial with the shaft 410 (it will be  
20 understood that due to the mirror image construction of the housing halves 400A and 400B the guide rails 450, 452 shown in Fig. 5 are duplicated on the inside surface of the opposite housing half so as to form a pair of guide rails in each case). Each element has a  
25 groove 454 along each opposite side and these are engaged in the housing 400 by the guide rails 450 and 452 to direct the element along the desired path between the entrance 402 and exit 404. The pair of straight guide rails 450 resists the turning torque  
30 produced on the element 414 by the worm gear 438 so as to keep each element 414 straight as the belt 426 engages or disengages.

To allow each element 414 to join or leave the column 440 by rotation relative to the next element as it follows the pair of curved guide rails 452, each element 414 has a side opening 456 for passage of the drive shaft 442, see especially Fig. 3(b). The width of the opening 456 is preferably such as to leave at least 80% of the circumference of the threaded bore 436.

10 The input guide 406 also has a pair of guide rails 458 extending continuously through the length of the guide. In the main body of the guide 406 the guide rails are straight, as indicated by the dashed line in Fig. 7, but the portions 458A at the front of the guide are  
15 part-circular and concentric with the axis of the shaft 410. The radius of the portions 458A is slightly less than that of the guides 452 so that the latter ride over the former as seen in Fig. 2, the degree of overlap depending on the angle of the input guide 406  
20 relative to the drive housing 400. Thus the pairs of guides 450, 452 and 458 form a continuous guide for the elements 414 from the drive housing exit 404 to the rear end of the input guide 406.

25 In Fig. 2 the shaft 442 is shown being driven by an electric motor 460 via a gearbox 462, but any other suitable arrangement may be used. For example, the shaft 442 may be driven by a belt.

30 As mentioned previously, the input guide 406 is rotatable relative to the drive housing 400 to permit the angle of the input guide to be varied relative to the column 440. In this embodiment the angle can be

varied between about 60 and 180 degrees, as seen in Fig. 8. Fig. 8 also shows a variation of the embodiment shown in Fig. 2 where the toothed belt 426 is not attached to a take-up spool but is instead fed round loosely in the drive housing 400 to re-engage the elements 414 where they emerge from the input guide 406 into the housing. From that point the belt extends along and in engagement with all the elements 414 in the guide 406 and beyond the free end of the guide 406 to the end element 414B, Fig. 8(a), to which the belt is fixed. This ensures that the elements are maintained in linear alignment prior to entering the guide 406.

Alternatively, the elements 414 could follow a helical path within the drive housing 400, up to the point where they emerge from the exit 404.

In a further variation of the embodiment shown in Fig. 2 the belt 426 can be omitted entirely. In that case the elements 414 can be manually secured to one another as they emerge from the housing exit 404. For example, along their edges opposite the edge 416 (Fig. 2) the elements could have cooperating formations, not shown, similar to the arms 420 and flanges 422 shown in Fig. 3(b). Then, as each element 414 emerges from the housing exit 404 and lines up with the preceding element the flange on one element would come to lie between the arms of the other element and a pin could be manually inserted into the aligned holes in these components thus locking them together face-to-face. Similarly, upon withdrawal of the elements into the housing, the pins could be removed one by one. It is

also possible to devise a mechanism whereby the pins are inserted and removed automatically.

In use of the actuator the drive housing 400 is fixed  
5 to the frame of a bed or other apparatus for which  
lifting and/or other mechanical action is required.  
The drive housing 400 can be bolted rigidly and non-  
rotatably to the frame by bolts passing through holes  
464. Alternatively, the drive housing 400 can be  
10 rotatably fixed to the frame by a single bolt passing  
through the hollow shaft 410. This latter fixing  
arrangement would be desirable, for example, where the  
column 440 constitutes the leg of a bed and the drive  
housing is fixed to the side frame of the bed. In such  
15 a case, if the head of the bed is lifted or lowered  
relative to the foot and the side frame becomes sloped,  
the rotation of the drive housing 400 allows the leg  
has to remain vertical.

20 The invention is not limited to the embodiments  
described herein which may be modified or varied  
without departing from the scope of the invention.

Claims

1. An actuator comprising a series of elements each rotatable relative to the next, a housing accommodating at least part of the series of elements with one end of the series projecting freely beyond an exit of the housing, the elements being guided to follow a non-linear path to the exit, means for driving the series of elements relative to the housing to vary the total length of elements projecting beyond the exit, and means for maintaining the projecting elements in linear alignment in a substantially rigid column.
2. An actuator as claimed in claim 1, wherein the maintaining means comprises a flexible, substantially inelastic toothed belt which is brought progressively into positive engagement with the elements as they rotate into alignment with the column.
3. An actuator as claimed in claim 1 or 2, wherein the elements are hollow and the drive means includes at least one gear located inside the elements as they pass through the housing and which drivingly engages an inside surface of the elements, the elements having an opening on one side which allows passage of a support means for the gear wheel.
4. An actuator as claimed in claim 3 wherein each element has a helically-threaded bore whose axis, when the element is in the linearly aligned column, is coaxial with other such bores in the column to form a continuous helical thread along the column, and wherein the gear wheel comprises a worm gear disposed at the



free end of a drive shaft whose rotational axis is coaxial with that of the bores in the column, the worm gear meshing with at least one element in the column at any one time such that rotation of the worm gear

- 5 increases or decreases the length of the column according to the direction of rotation of the worm gear, each element having a side opening for passage of the drive shaft to allow each element to join or leave the column by rotation relative to the next element.

10

5. An actuator as claimed in any preceding claim, wherein the series of elements enters the housing through an input guide which is rotatable relative to the housing over a range of angles relative to the

15 linearly aligned column.

**Abstract**

(Fig. 2)

An actuator comprises a series of elements 414 each  
5 pivoted to the next and a housing 400 accommodating at  
least part of the series of elements with one end of  
the series projecting freely beyond an exit 404 of the  
housing. The elements 414 are guided to follow a  
curved path to the housing exit 404 and are driven  
10 along the path by a drive mechanism 412 to vary the  
total length of elements projecting beyond the exit.  
The projecting elements are maintained in linear  
alignment in a substantially rigid column 440 by a  
toothed belt 426 which progressively engages the  
15 elements 414 as they emerge from the housing exit 404.

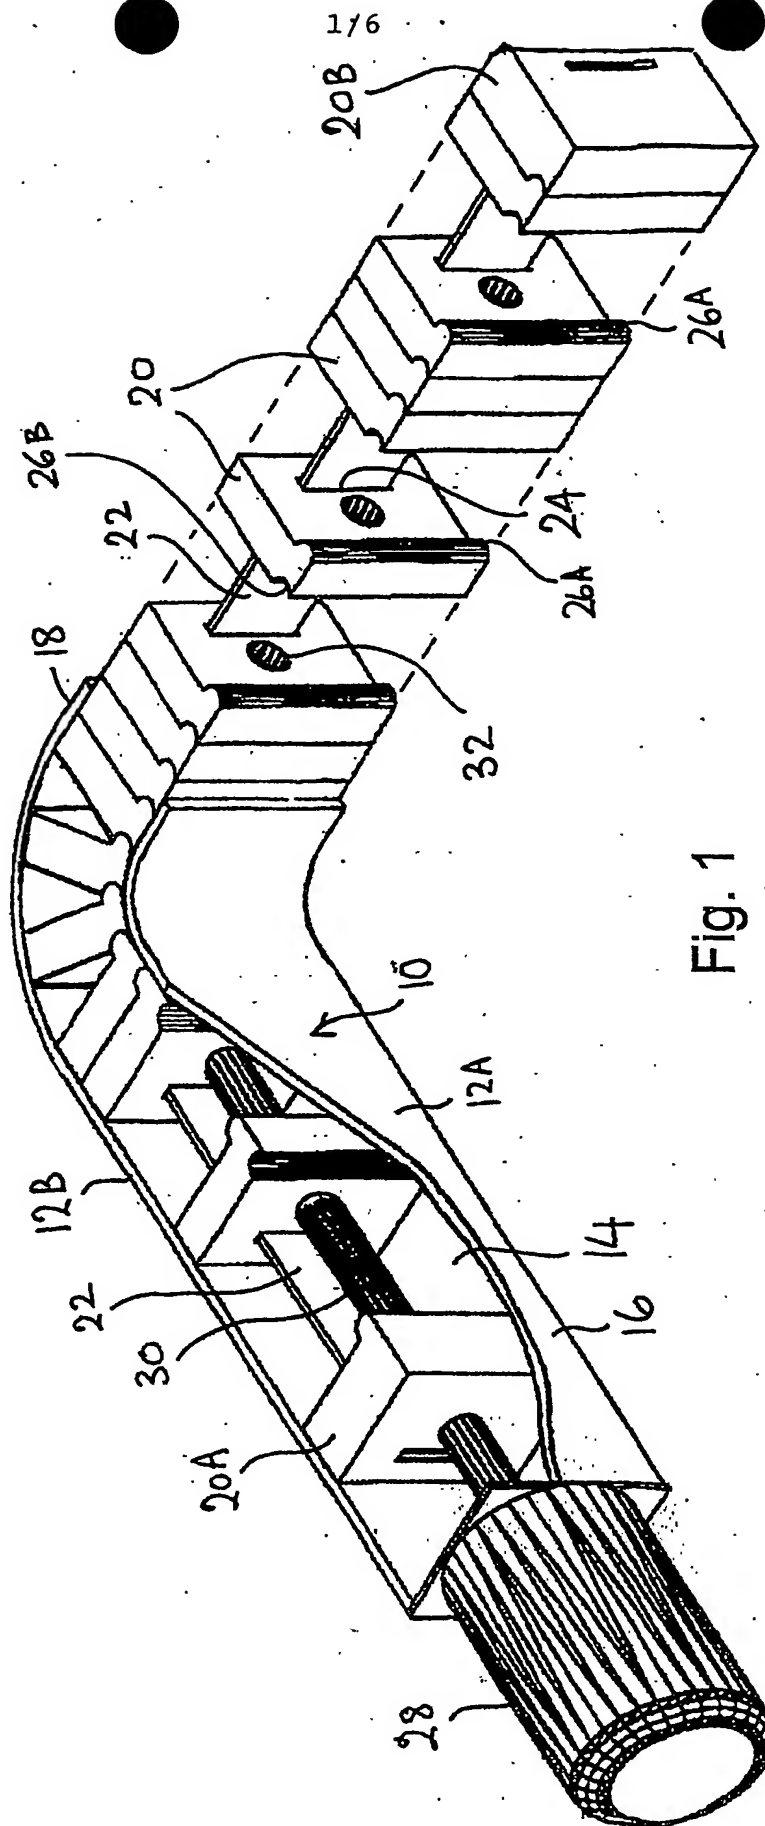


Fig. 1

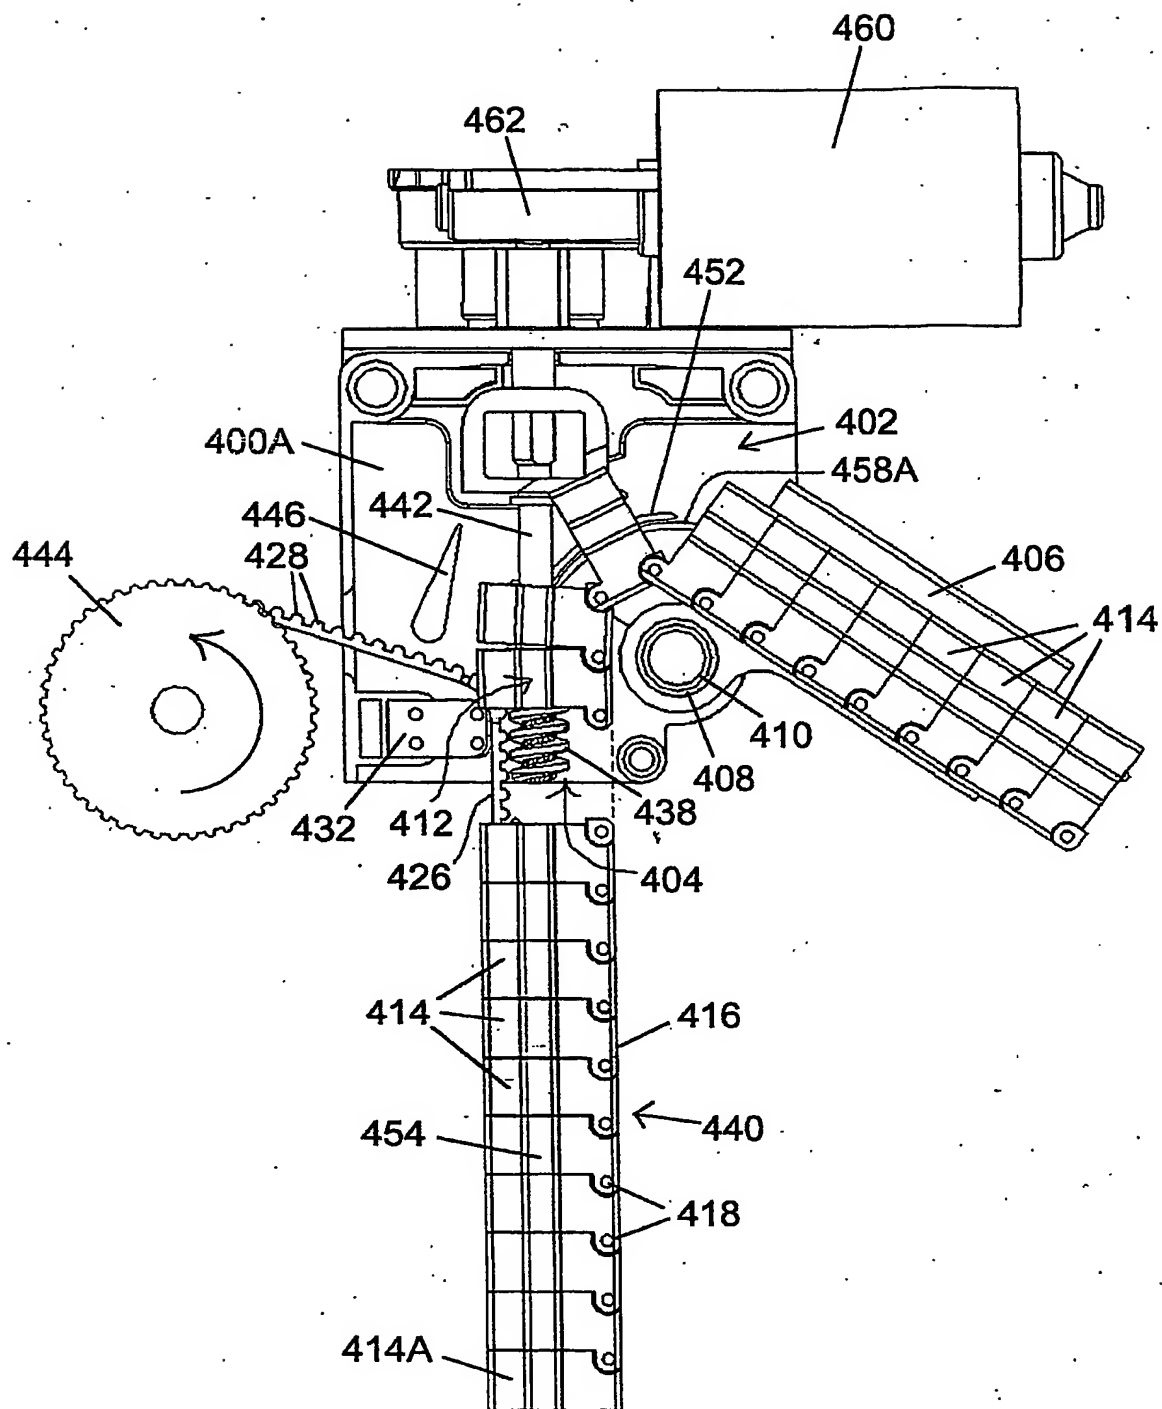


Fig. 2

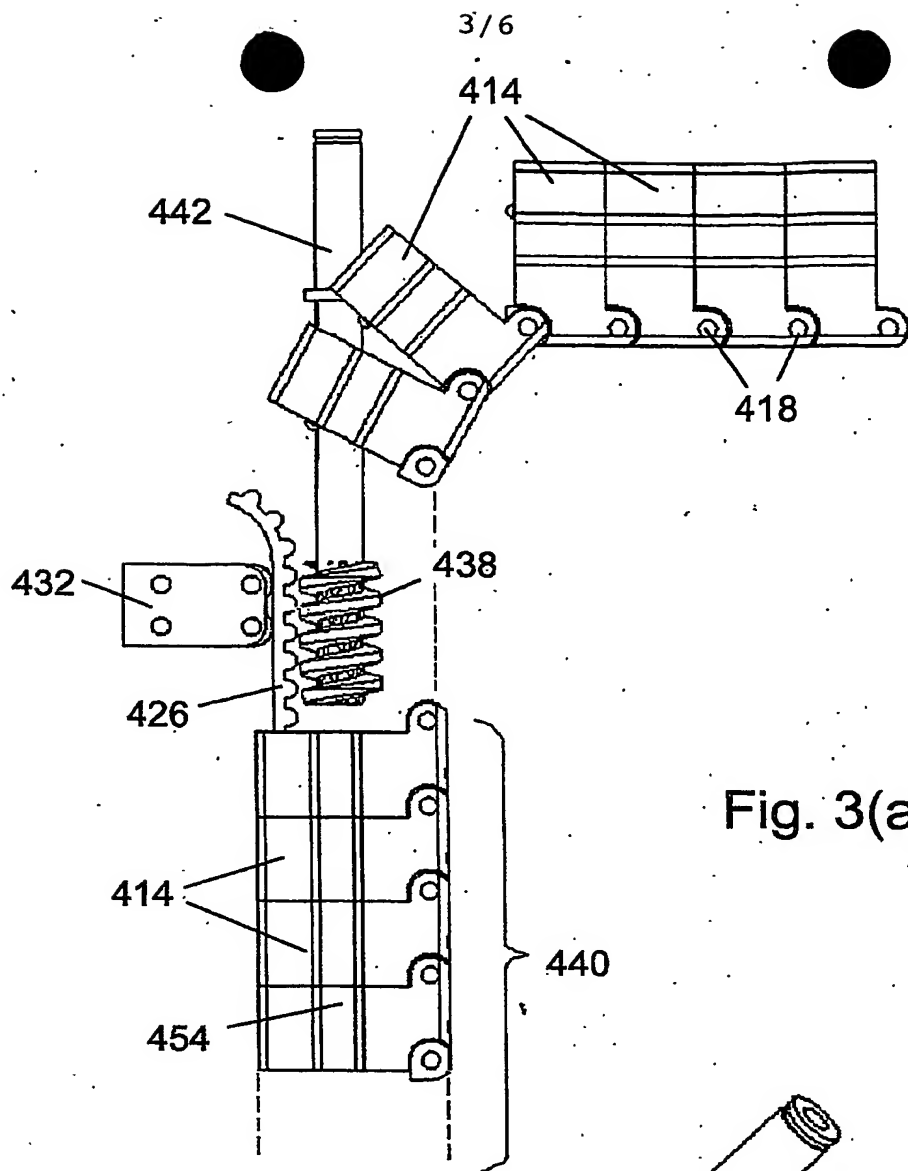


Fig. 3(a)

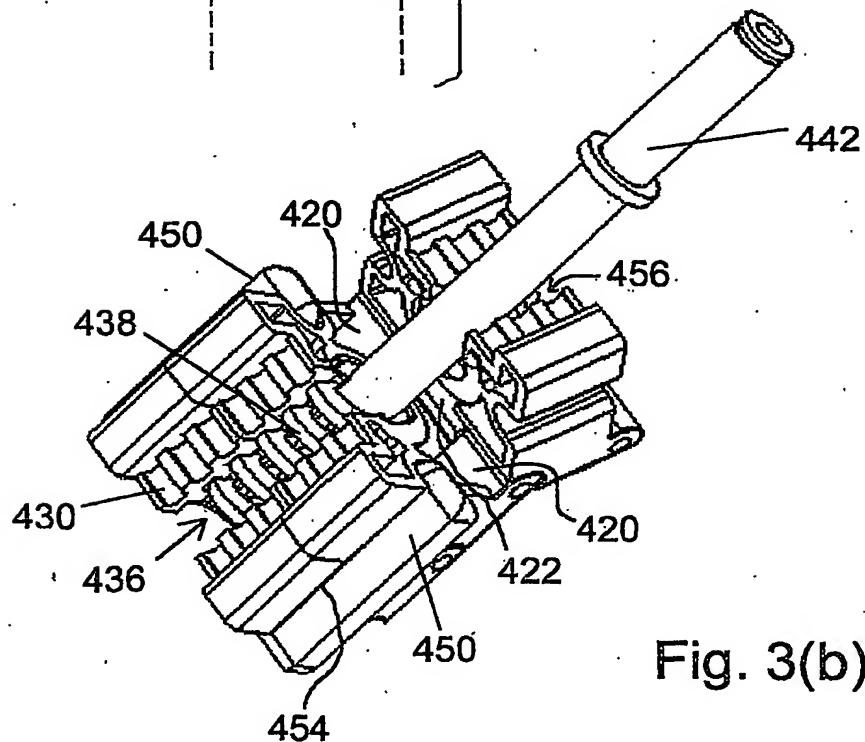


Fig. 3(b)

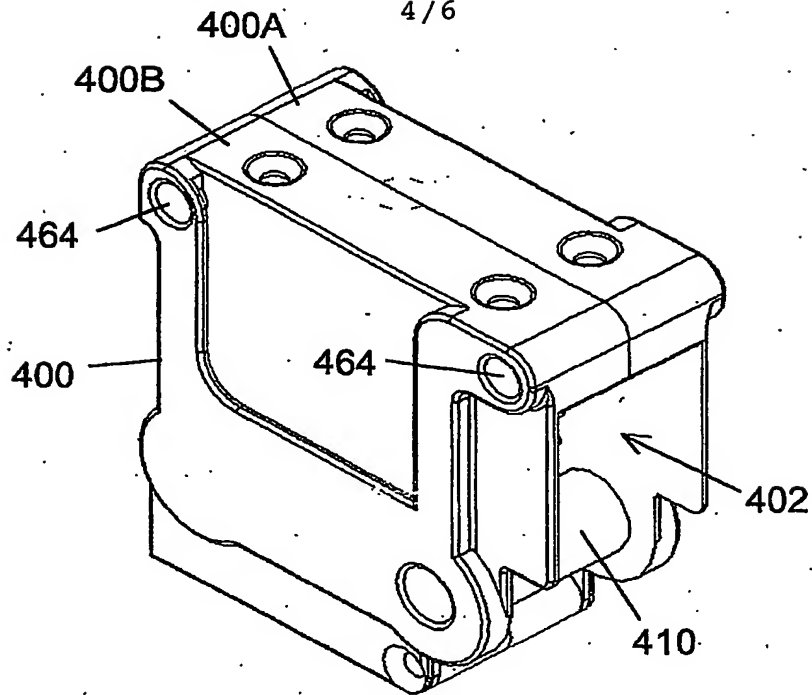


Fig. 4

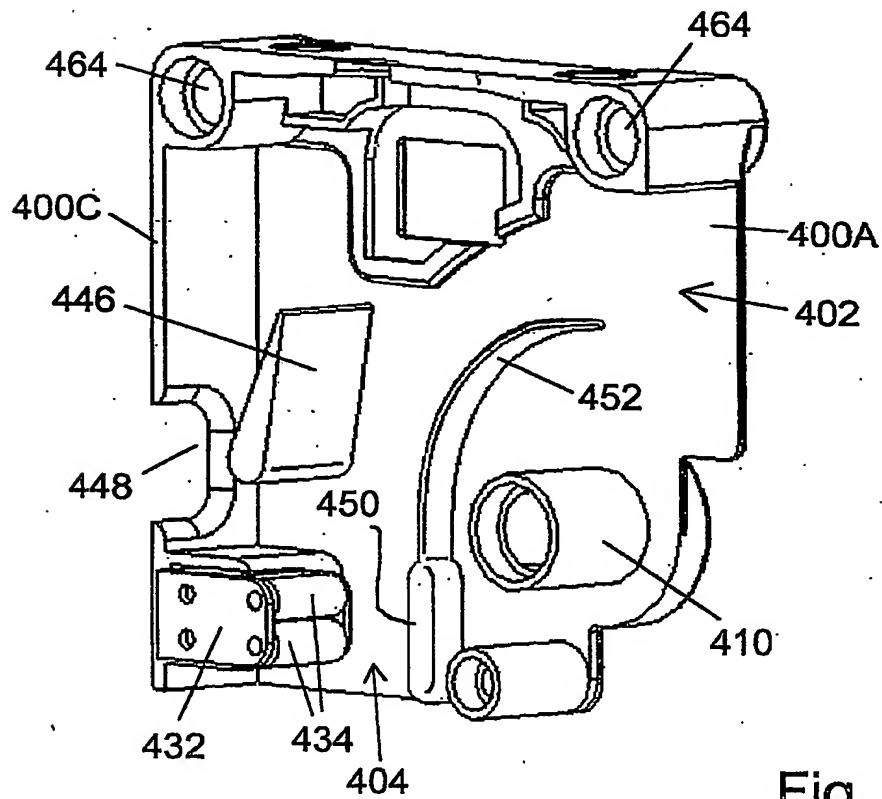


Fig. 5

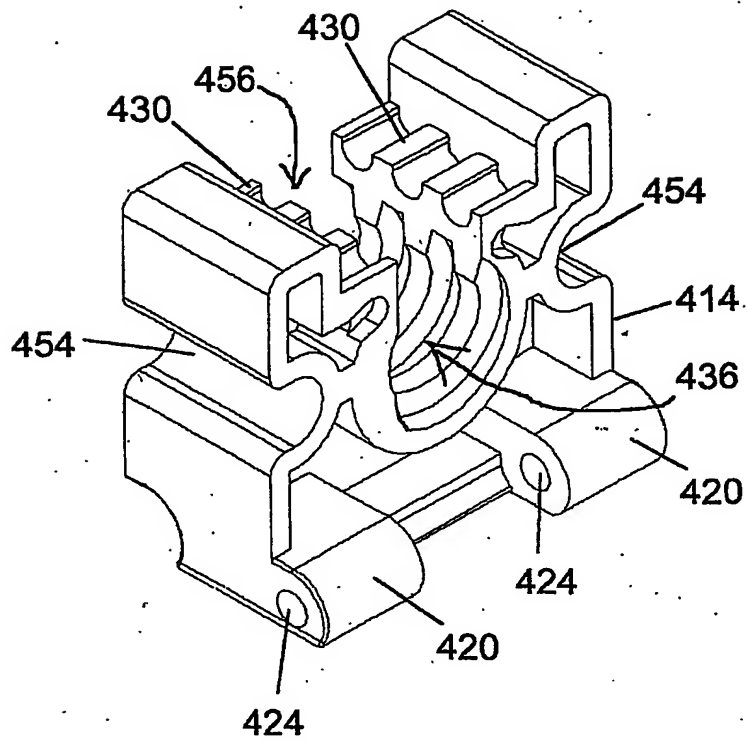


Fig. 6

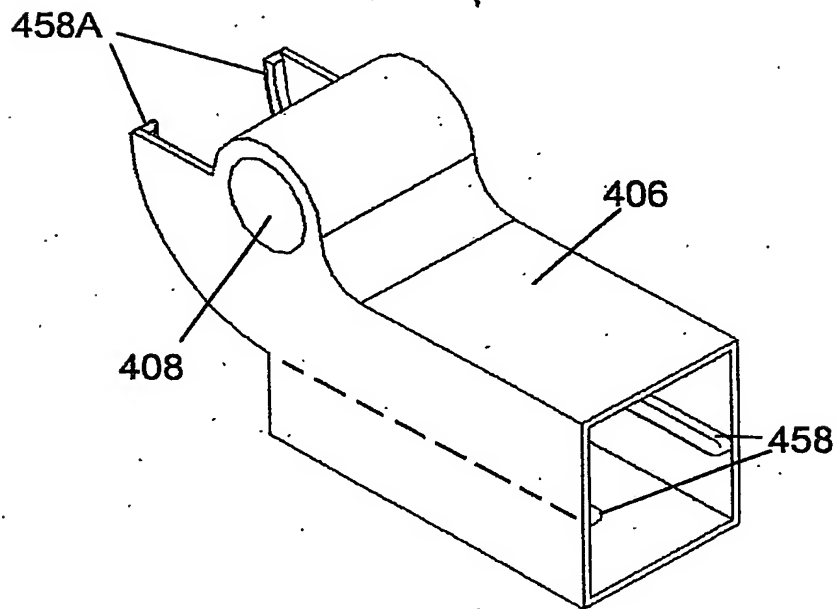


Fig. 7

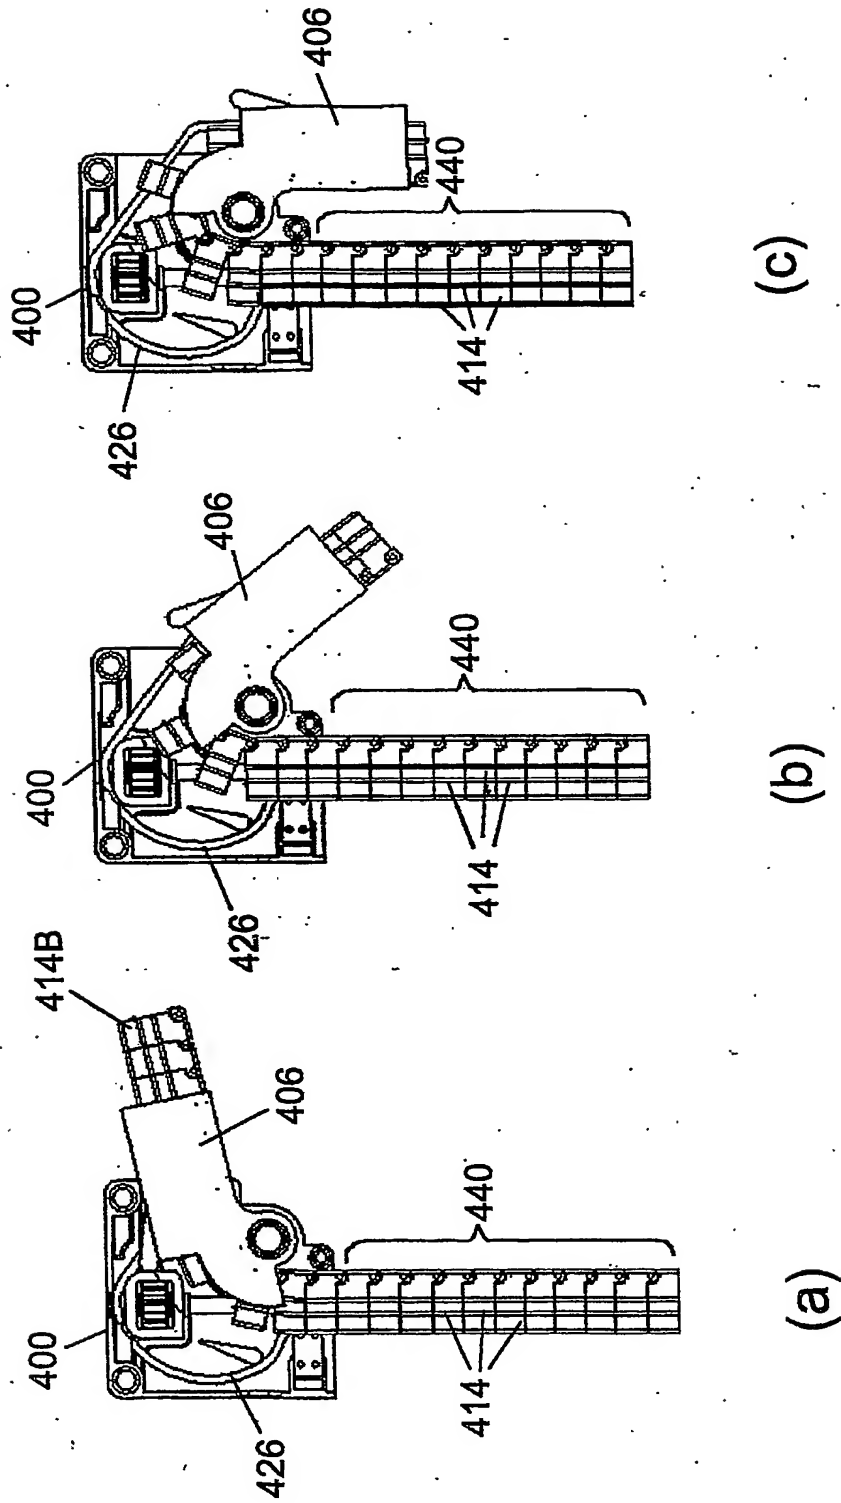


Fig. 8



This Page is inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record

## BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ BLACK BORDERS

☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES

☒ FADED TEXT OR DRAWING

☒ BLURED OR ILLEGIBLE TEXT OR DRAWING

☒ SKEWED/SLANTED IMAGES

☐ COLORED OR BLACK AND WHITE PHOTOGRAPHS

☐ GRAY SCALE DOCUMENTS

☒ LINES OR MARKS ON ORIGINAL DOCUMENT

☐ REPERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images  
problems checked, please do not report the  
problems to the IFW Image Problem Mailbox**